

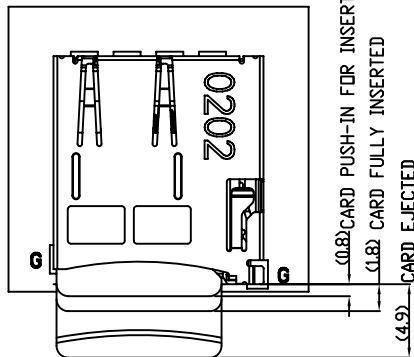
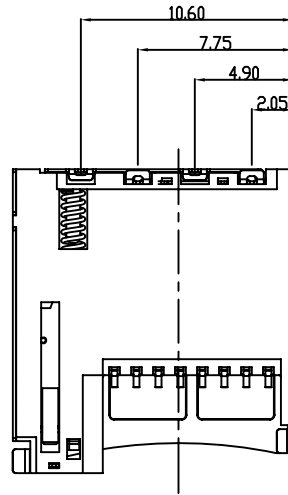



- NOTES:
1. DATE CODE 0202 (YVWD)
Y: 0 YEAR(2010)
WW:20 WEEK(01~52)
D: 2 DAY(01~07)
 2. 0202 WIDE x HIGH(6mm x 2mm)

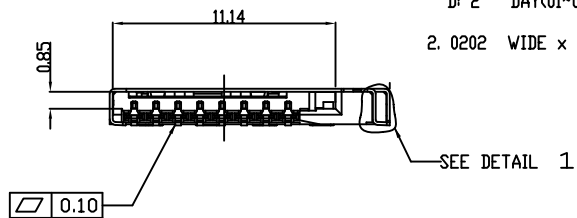

(0.8) CARD PUSH-IN FOR INSERTION
(1.8) CARD FULLY INSERTED
(4.9) CARD EJECTED

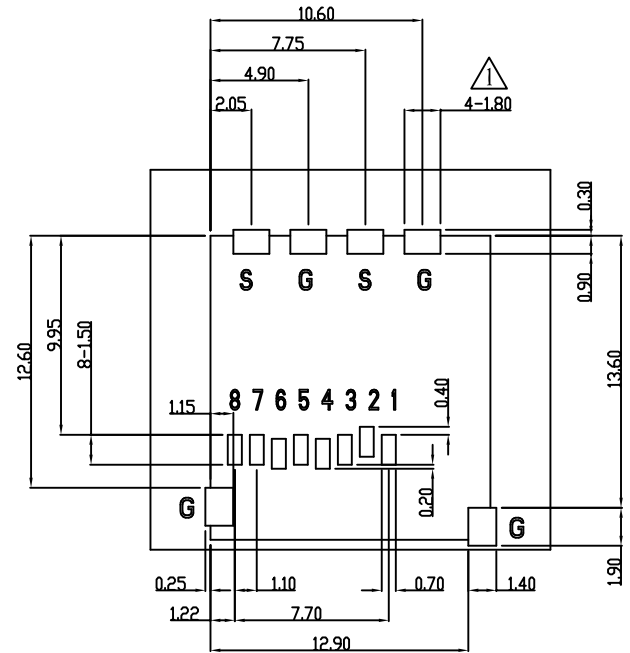

RECOMMEND PC BOARD LAYOUT

TFC-WPCE-08-LF
LEADFREE
RoHS Compliant

CARD DETECTION SWITCH	
WHEN CARD IS EJECTED	WHEN CARD IS INSERTED
CLOSE	OPEN
S G	S G

ITEM	PART NAME	Q'TY	MATERIAL
1	BODY	1	LCP+35%GF
2	SLIDER	1	LCP+35%GF
3	CONTACT	8	C5210R-EH
4	SWITCH	1	C2680R-H
5	SHELL	1	SUS304R-3/4H
6	DRAG LINK	1	SUS304
7	SPRING	1	PIANO WIRE

PIN NUMBER	PIN ASSIGNMENT	PIN NUMBER	PIN ASSIGNMENT
1	DAT2	6	VSS
2	CD/DAT3	7	DAT0
3	CMD	8	DAT1
4	VDD	S	CARD DETECTION
5	CLK	G	GROUND

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. TFC-WPCE-08

DWG NO. TFC-WPCE-08

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

Micro SD Socket
Top Mount Push-Push Type

AREA

REVISIONS

HK

DATE

煜倫股份有限公司